


Contact us at Zano Controls,  
 Unit 1 Chantry Court,  
 Wrythe Lane,  
 Carshalton,  
 Surrey,  
 SM5 2DG.  
 Tel: 0345 519 5858  
 Fax: 0845 519 5757  
 email: sales@zanocontrols.co.uk



**ZANO LED MODULES DATA SHEET: OFFSET**  
 MADE IN GREAT BRITAIN

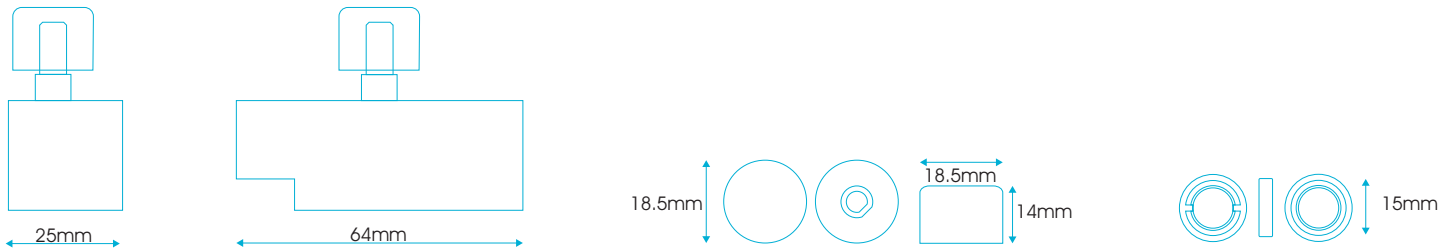

NB: knob not supplied with  
 naked module purchases

COMPATIBLE LOAD TYPE	LED
2-WAY SWITCH	YES
ON / OFF OPERATION STYLE	PUSH ON / PUSH OFF
DIMMING OPERATION	ROTARY
PROTECTION	OVERLOAD/THERMAL
SMART SETTINGS	YES
DB NOISE DURING OPERATION	- 110 DBA
SOFT START	YES
SUPPLY VOLTAGE	110V- 240V AC
FREQUENCY RANGE	40 - 50Hz +/- 10%
MAX OPERATING TEMPERATURE	70° C
RH RANGE	95% NON CONDENSING
MAX AMBIENT TEMPERATURE	35° C
MINIMUM AMBIENT TEMPERATURE	0° C
TERMINAL TORQUE MAX SETTING	0.5 NM
MAX TERMINAL CAPACITY	3mm
MAX SWITCHING CAPACITY	4A RESISTIVE


PART CODES	ZMO150	ZMO250
MAX LOAD*	150W / VA	250W / VA
MIN LOAD*	0W / VA	5W / VA

\* Per Dimmer

**MAXIMUM PLATE LOAD RECOMMENDATIONS**

COVER PLATE SIZE	LED RATING
SINGLE PLATE	320W / VA
DOUBLE PLATE	640W / VA
6-8 GANG	1280W / VA

**DIMMER**

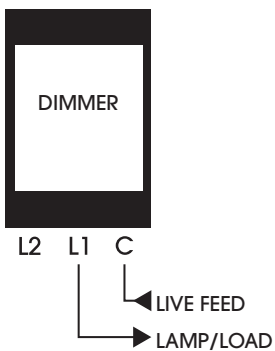

**2-WAY SWITCH AND DIMMER**

